

SE Insulator



Full Type



High Strength



Flame Retardant




RoHS

SE busbar insulator is made of DMC, used for low voltage application (660V-4500V), such as distribution box, switchgear, inverter and green power and so on.

CE, SGS, ROHS certificate for SE insulator.

PARAMETERS

- Model: SE
- Screw: M6/M8/M10
- Material: DMC, BMC
- Voltage: 660V-4500V
- Flame Retardant: UL94-V0
- Type: Terminal
- Customized: Yes
- Application: Insulation Support

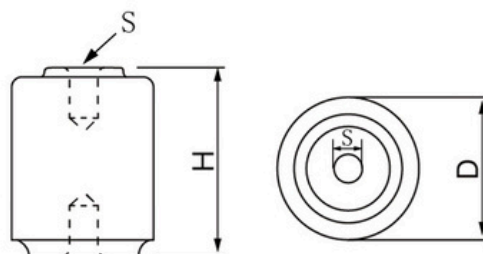

Model	Diameter(D) (mm)	Height(H) (mm)	Screw(S)	Customized
SE3030	30	30	M6	According customer's requirement
SE3040	30	40	M6	
SE4040	40	40	M8	
SE4060	40	60	M10	
SE5040	50	40	M10	