

# SEP Insulator



Full Type



High Strength



Flame Retardant




RoHS

SEP busbar insulator is hexagonal, ROHS, UL94 V0, made of DMC, used for low voltage application (660V-4500V), such as distribution box, switchgear, inverter and green power and so on.

CE, SGS, ROHS certificate for hexagonal insulator.

## PARAMETERS

- Model: SEP
- Screw: M6/M8/M10/M12/M14/M16
- Material: DMC, BMC
- Voltage: 660V-4500V
- Flame Retardant: UL94-V0
- Customized: Yes
- Application: Insulation Support

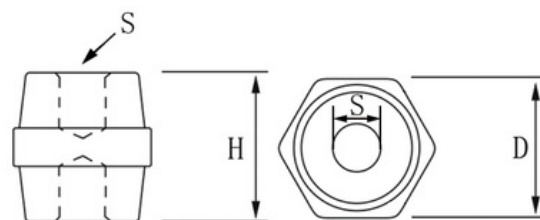

| Model    | Diameter(D)(mm) | Height(H)(mm) | Screw(S)    | Customized                       |
|----------|-----------------|---------------|-------------|----------------------------------|
| SEP1615  | 15              | 16            | M4/M5       | According customer's requirement |
| SEP2019  | 19              | 20            | M4/M5/M6    |                                  |
| SEP2519  | 19              | 25            | M5/M6       |                                  |
| SEP2522  | 22              | 25            | M4/M5/M6    |                                  |
| SEP2525  | 25              | 25            | M8          |                                  |
| SEP3030  | 30              | 30            | M6/M8/M10   |                                  |
| SEP3040  | 40              | 30            | M8/M10      |                                  |
| SEP3532  | 32              | 35            | M8/M10      |                                  |
| SEP3540  | 40              | 35            | M8/M10      |                                  |
| SEP3541  | 41              | 35            | M6/M8/M10   |                                  |
| SEP4041  | 41              | 40            | M8/M10/M12  |                                  |
| SEP4046  | 46              | 40            | M8/M10/M12  |                                  |
| SEP4546  | 46              | 45            | M8/M10/M12  |                                  |
| SEP5036  | 36              | 50            | M6/M8/M10   |                                  |
| SEP5046  | 46              | 50            | M8/M10      |                                  |
| SEP5050  | 50              | 50            | M8/M10/M12  |                                  |
| SEP6060  | 60              | 60            | M8/M10/M12  |                                  |
| SEP6541  | 41              | 65            | M8/M10/M12  |                                  |
| SEP7060  | 60              | 70            | M10/M12/M16 |                                  |
| SEP7550  | 50              | 75            | M8/M10/M12  |                                  |
| SEP10050 | 50              | 100           | M10/M12/M16 |                                  |